

TSOP2 MRAM Packages



44-Pin TSOP2



54-Pin TSOP2

- Compliant with RoHS, REACH regulations and practices.
- Contains no Red Phosphorus.
- Lead Free.
- Assemble using a JEDEC standard reflow profile.
- Compliant with EICCeSI Environmental Guidelines.



TABLE OF CONTENTS

COMPLIANCE WITH ENVIRONMENTAL REGULATIONS AND DIRECTIVES	2
MULTIPLE REFLOW CYCLES AND MOISTURE RESISTANCE	2
RECOMMENDED REFLOW TEMPERATURES AND TIMING - ALL PACKAGES	3
Figure 1 – Recommended Reflow Profile - All Packages	3
THERMAL RESISTANCE	4
Table 1 – Thermal Resistance 44-Pin TSOP2.....	4
Table 2 – Thermal Resistance 54-Pin TSOP2.....	5
PACKAGE OUTLINE DRAWINGS	6
Figure 2 – Package Outline 44-Pin TSOP2.....	6
Figure 3 – Package Outline 54-Pin TSOP2.....	7
REVISION HISTORY	8
CONTACT US	9

COMPLIANCE WITH ENVIRONMENTAL REGULATIONS AND DIRECTIVES

Environment	Statement Summary	Download Full Statement
RoHS	Everspin Technologies, Inc. MRAM products comply with RoHS Directive 2002/95/EC.	Full RoHS Compliance Statement
REACH	Under the definition of the REACH regulations EC1907/2006, Everspin Technologies is a producer of "articles". REACH requires article suppliers to inform recipients if an article contains a Substance of Very High Concern (SVHC) in excess of 0.1% by weight. Everspin products do not contain any of these SVHC in excess of 0.1% by weight.	Full REACH Statement
Red Phosphorus	Everspin Technologies, Inc. MRAM products do not contain Red Phosphorus CAS# 7723-14-0 as an intentional additive.	Full Red Phosphorus Statement
Environmental and Humanitarian Compliance	Materials from Conflict Regions Statement	Full Statement
	EICCeSI Environmental and Humanitarian Compliance Form	Form

MULTIPLE REFLOW CYCLES AND MOISTURE RESISTANCE


All Everspin packages are qualified by the procedure defined in IPC/JEDEC joint specification IPC/JEDEC J-STD-020D.1. They are guaranteed to withstand up to three reflow cycles without permanent damage, provided the conditions for the rated moisture resistance level for the part are observed prior to reflow.

Everspin parts are generally rated for MSL Level 3. Exceptions may exist and are noted in their respective data sheet. Please check the latest individual product data sheet to confirm the rated MSL for the product.

RECOMMENDED REFLOW TEMPERATURES AND TIMING - ALL PACKAGES

Everspin products can be assembled using a standard reflow profile. The profile below is based on IPC/ JEDEC J-STD-020D.1.

Figure 1 – Recommended Reflow Profile - All Packages

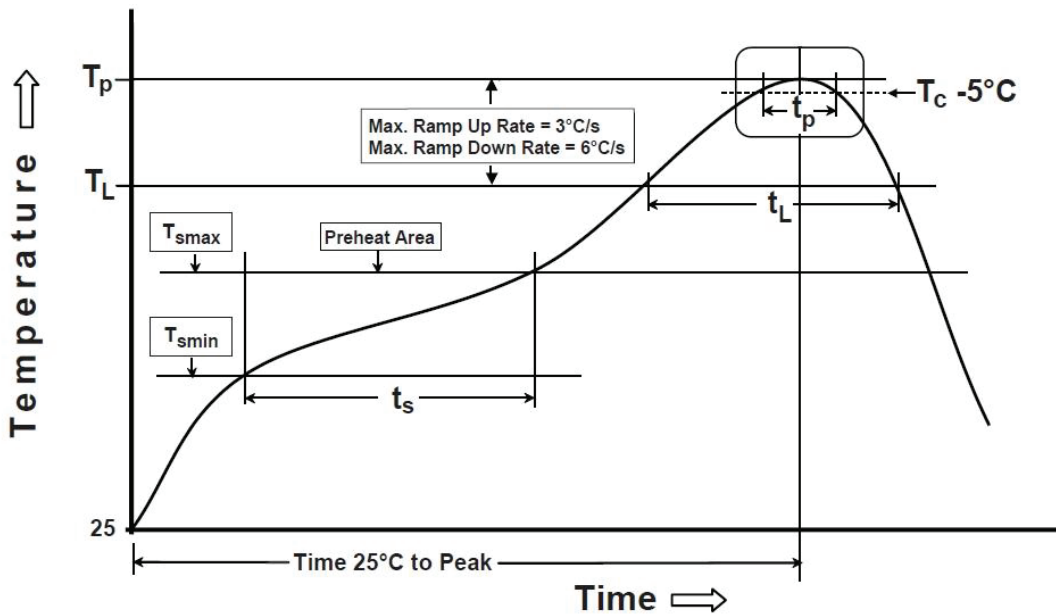

Profile Step	Parameter	Symbol	Time/Temp	Unit
Preheat / Soak	Temperature minimum	T_{SMIN}	150	°C
	Temperature maximum	T_{SMAX}	200	°C
	Soak Time	t_s	60 - 120	Seconds
Ramp Up	Rate from T_L to T_p	T_L to T_p	3° / Sec Max	° / Sec
	25°C to T_p		8 minutes max	Minutes
Reflow	Liquidous Temperature	T_L	217	°C
	Time Above T_L		60 - 150	Seconds
	Peak Package Body Temperature	T_p	260	°C
	Time within 5° of Peak Package Body Temperature		20 - 40	Seconds
Ramp Down	Rate from T_p to T_L	T_p to T_L	6° / Sec Max	° / Sec

THERMAL RESISTANCE

Table 1 – Thermal Resistance 44-Pin TSOP2

All values determined by simulation.

Velocity (m/s)	Θ_{JA} (°C/W)	Θ_{JB} (°C/W) ³	Θ_{JC} (°C/W) ⁴	Θ_{JL} (°C/W) ⁶	Ψ_{JT} (°C/W) ⁵
0	60 ¹	20	7	12	2
3	47 ²				

Notes:

1. Per SEMI G38-87 and JEDEC JESD51-2 with the single layer board (JESD51-3) horizontal.
2. Per JEDEC JESD51-6 with the board (JESD51-7) horizontal. There are no thermal vias connecting the package to the two planes in the board.
3. Thermal resistance between the die and the printed circuit board per JEDEC JESD51-8. Board temperature is measured on the top surface of the board near the package.
4. Thermal resistance between the die and the case top surface as measured by the cold plate method (MIL SPEC-883 Method 1012.1).
5. Thermal characterization parameter indicating the temperature difference between package top and the junction temperature per JEDEC JESD51-2. When Greek letters are not available, the thermal characterization parameter is written as Psi-JT.
6. Thermal resistance between the junction and the thermal (fused) lead is not a JEDEC specified thermal resistance, but is useful for calculation.

Table 2 – Thermal Resistance 54-Pin TSOP2

All values determined by simulation.



Velocity (m/s)	Ambient Temp	Θ_{JA} (°C/W)	Θ_{JB} (°C/W)	Θ_{JC} (°C/W)
0	55°C	45.16	33.47	14.42
1		35.78	NA	
2		33.81		
3		32.65		
0	125°C	42.09	32.82	14.30
1		35.78	NA	
2		33.81		
3		32.65		

Notes:

1. Θ_{JB} value assumes 4-layer PCB.

PACKAGE OUTLINE DRAWINGS

Figure 2 – Package Outline 44-Pin TSOP2

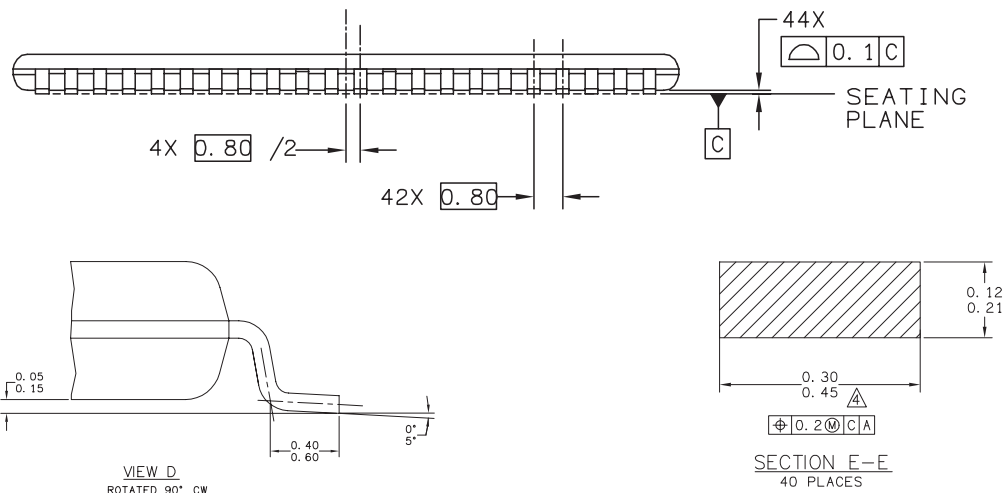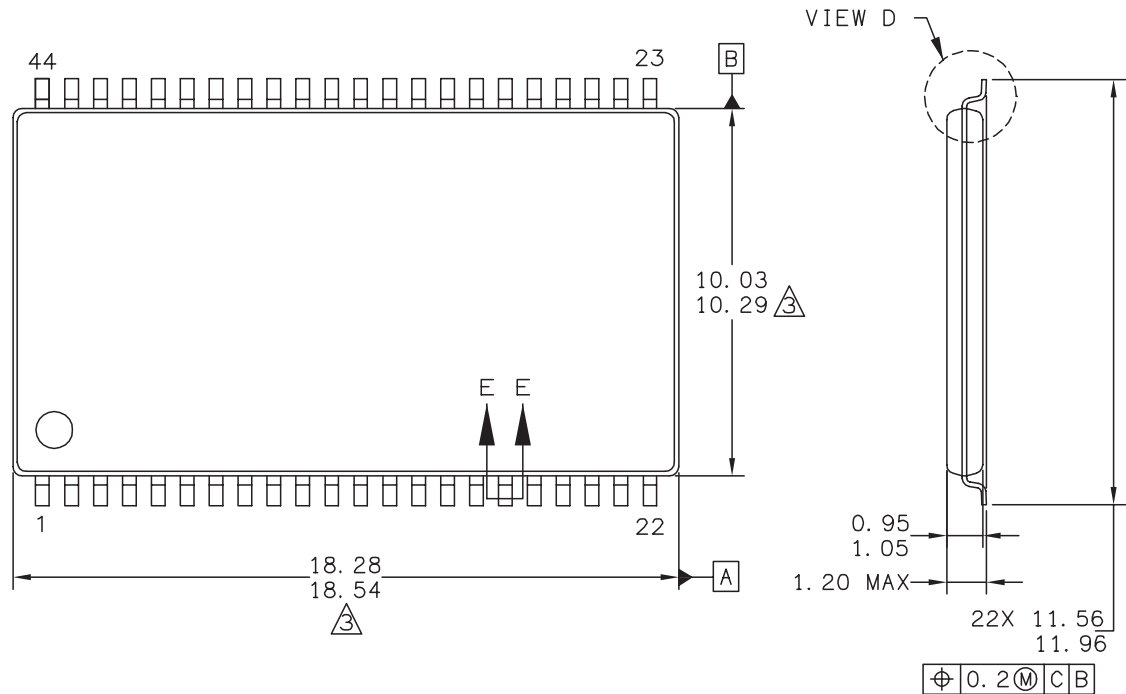


Print Version Not To Scale

1. Dimensions and tolerances per ASME Y14.5M - 1994.
2. Dimensions in Millimeters.
3. Dimensions do not include mold protrusion.
4. Dimension does not include DAM bar protrusions.
5. DAM Bar protrusion shall not cause the lead width to exceed 0.58.



Figure 3 – Package Outline 54-Pin TSOP2

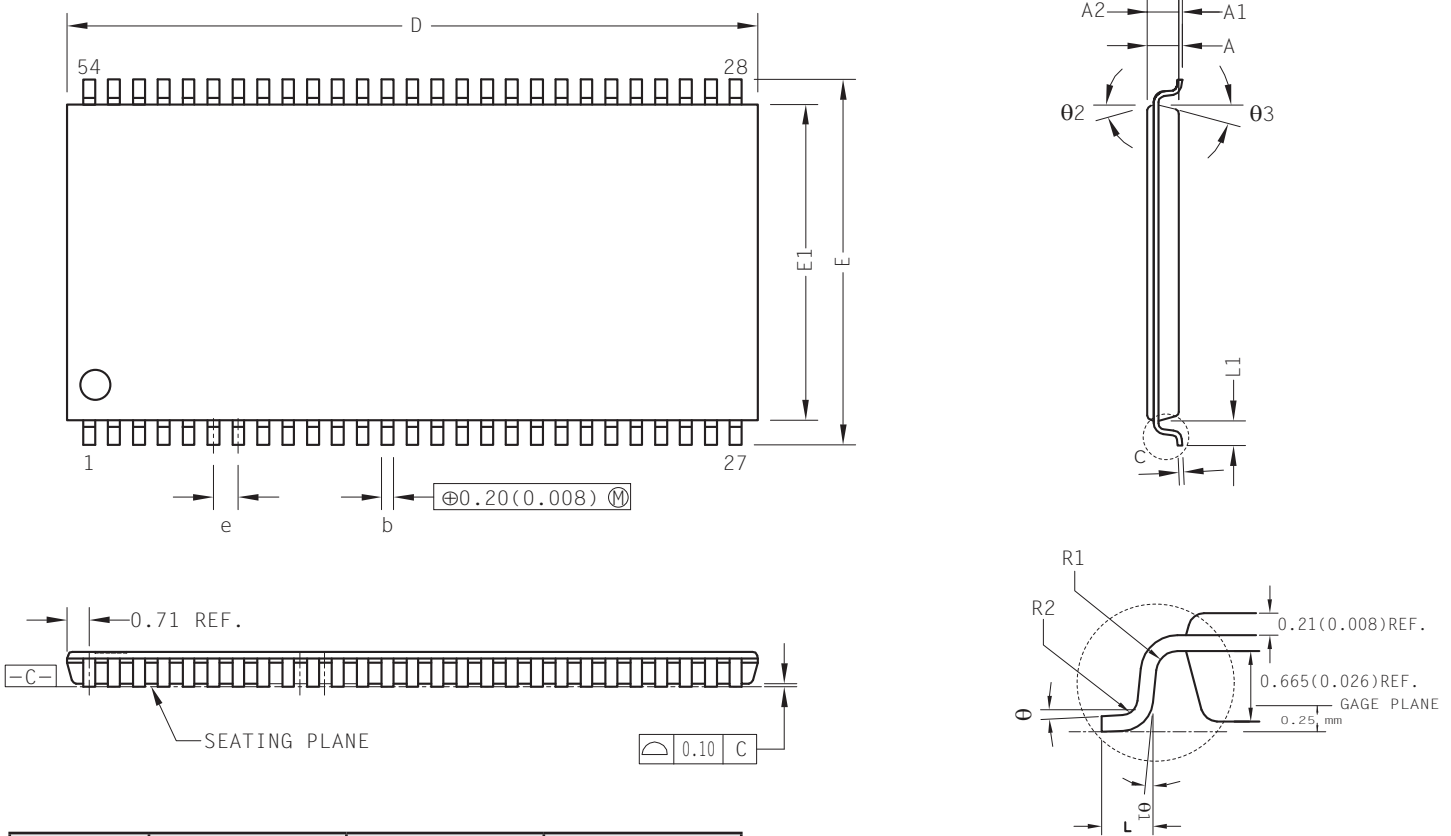

Print Version Not To Scale

1. Dimensions in Millimeters.
2. Package dimensions refer to JEDEC MS-024



Ref	Min	Nominal	Max
A			1.20
A1	0.05	0.10	0.15
A2	0.95	1.00	1.05
b	0.30	0.35	0.45
c	0.12		0.21
D	22.10	22.22	22.35
E	11.56	11.76	11.95
E1	10.03	10.16	10.29
e	0.80 BSC		
L	0.40	0.50	0.60
L1	0.80 REF		
R1	0.12	-	-
R2	0.12	-	0.25
θ	0°	-	8°
θ1	0.40	-	-
θ2	15° REF		
θ3	15° REF		

REVISION HISTORY

Revision	Date	Description of Change
1.0	August 7, 2013	Initial release.
1.1	August 27, 2013	Added 25°C to T _p data to the Temperature Profile Table 1.
1.2	October 21, 2014	Added Reflow Cycle and Moisture Resistance section.

CONTACT US

Contact Information:

How to Reach Us:

Home Page:

www.everspin.com

E-Mail:

support@everspin.com

orders@everspin.com

sales@everspin.com

USA/Canada/South and Central America

Everspin Technologies

1347 N. Alma School Road, Suite 220

Chandler, Arizona 85224

+1-877-347-MRAM (6726)

+1-480-347-1111

Europe, Middle East and Africa

support.europe@everspin.com

Japan

support.japan@everspin.com

Asia Pacific

support.asia@everspin.com

Everspin Technologies, Inc.

Information in this document is provided solely to enable system and software implementers to use Everspin Technologies products. There are no express or implied licenses granted hereunder to design or fabricate any integrated circuit or circuits based on the information in this document. Everspin Technologies reserves the right to make changes without further notice to any products herein. Everspin makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Everspin Technologies assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters, which may be provided in Everspin Technologies data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters including "Typicals" must be validated for each customer application by customer's technical experts. Everspin Technologies does not convey any license under its patent rights nor the rights of others. Everspin Technologies products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Everspin Technologies product could create a situation where personal injury or death may occur. Should Buyer purchase or use Everspin Technologies products for any such unintended or unauthorized application, Buyer shall indemnify and hold Everspin Technologies and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Everspin Technologies was negligent regarding the design or manufacture of the part. Everspin™ and the Everspin logo are trademarks of Everspin Technologies, Inc. All other product or service names are the property of their respective owners.

Copyright © 2014 Everspin Technologies, Inc.

