

BLACK COLOR UL 94V0 RATED NI/CU POLYESTER TAFFETA FABRIC-OVER-FOAM

Laird Technologies' Fabric-over-Foam (FoF) 51L EMI gaskets consist of a black color and provide excellent EMI shielding performance for customers where EMI issues occur. The 51L series EMI gaskets are composed of electrically conductive fabric wrapped around a soft urethane foam core. They are supplied with either a conductive or non-conductive pressure sensitive adhesive (PSA), and can be equipped with an Extended Release Liner (ERL) on the adhesive. The 51L is a halogen-free and UL 94V0 product and can be created with cross-section profiles such as rectangle, D, C, P, T, knife, bell shapes, and others. The 51L EMI gaskets can be further customized to an application by die-cutting, hole punching, notching, etc.


FEATURES

- Fabric-over-Foam gaskets are RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- UL 94V0
- Black color
- Low surface resistivity of < 0.06 ohms/sq provides excellent conductivity
- Shielding effectiveness of >100 dB across a wide spectrum of frequencies
- Extremely low compression forces allow for use of lighter materials
- Fabric is highly conductive to provide good EMI shielding and grounding
- Abrasion resistant metallized fabrics show virtually no degradation in electrical performance after 1,000,000 cycles
- Available with conductive or non-conductive PSA
- Many cross-section profiles available such as rectangle, D, C, P, T, knife, bell and more
- Profile gaskets can be cut to specified lengths, kiss-cut on release liner, or mitered to form frame configurations


MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Laptop computers
- Networking equipment
- Desktop computers
- Telecommunications cabinets

Modified ASTM 3574 Compression Set Test
LT 4697-AB-H1K C-Fold vs. Competitive Equivalent

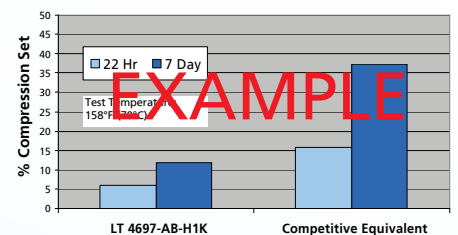

Force Displacement Resistance Graph of
LT 4243-AB-H1K vs. Competitive Equivalent

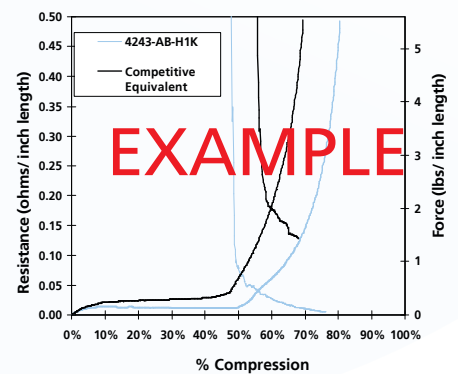

global solutions: local support™


USA: +1.866.928.8181

Europe: +49.0.8031.2460.0

Asia: +86.755.2714.1166

Item	Unit	Value	Test Method
Shielding Effectiveness			
at 100 MHz		110	SAE-ARP-1705(Mod.)
at 1 GHz	dB	112	(W10 mm x H8 mm)
Surface Resistivity	Ω	< 0.07	ASTM F390
Compression Set	%	< 20	ASTM D3574
Operation Temperature	$^{\circ}\text{C}$	-40 ~ 70	-
Flame Retardant	UL 94V0		
Hazardous Substance	Compliant with RoHS (Directive 2002/95/EC)		
	Compliant with SONY ss-00259		
	Halogen-free (based on IEC-61249-2-21)		
	Antimony-free		
Shelf Life	12 months at 23 $^{\circ}\text{C}$ / 60% R.H.		

COMPOSITION OF PRODUCT

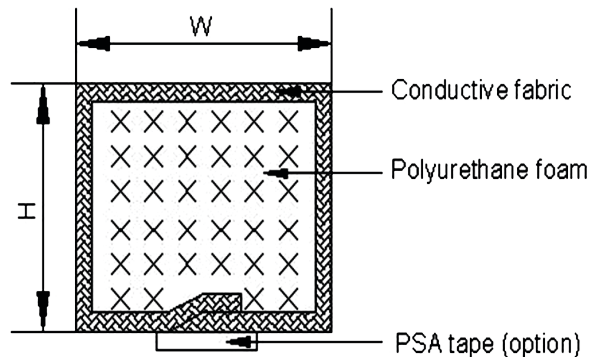

PRESSURE SENSITIVE ADHESIVE (PSA TAPE) OPTIONS

Name	Type	Thickness (mm)	Peel strength on stainless steel (JIS Z 0237)	Z-axis Resistance (ASTM D-257)
LT-301	Conductive PSA	0.09	> 1.3 kgf/25 mm	< 0.05 Ω
LT-350	PSA	0.12	> 2 kgf/25 mm	-

*Other PSA can be provided. Contact Laird Technologies engineering.

ORDERING INFORMATION

PART NUMBER EXAMPLE

Digits:	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
	4	2	1	6	A	A	-	5	1	L	-	0	1	4	0	0
	Profile Shape & Details							Product Name				Part Length				

EMI-DS-FOF-51L 1110

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.